


Optical Receiver Unit

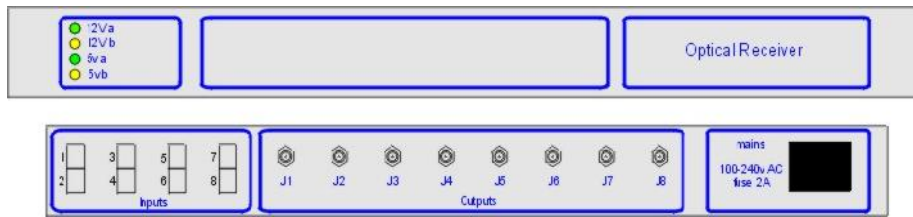

A Range of units for receiving RF over fibre and outputting RF on Coax.

Choice of 1 to 8 receivers in a 1U enclosure.

Optical power max +8dB

Wavelength 1260 - 1620nm

Optical connectors SC/APC, FC/APC, LC/UPC or SC/UPC


RF connectors 50 ohm SMA or 75 ohm BNC or F type

Single or dual Power Supplies

Optical and RF Connectors and Mains inlet on front or rear panel to suit rack wiring

Optional RF monitor ports

Optional Spectrum analyser . Signals can be monitored at either Optical or RF.

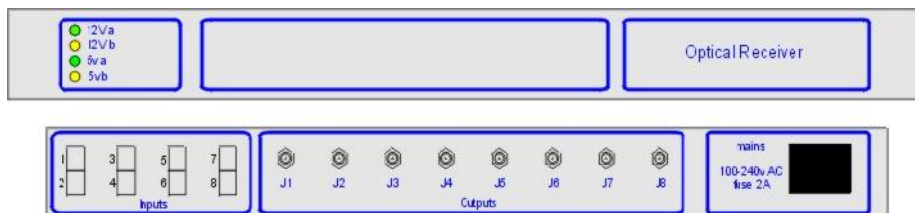

CCS (satcom) Ltd, 2, Ajax Close, Braintree, CM7 9UP, England
Tel +44 (0) 1376 552 736 mobile: 077 342 766 84

-